



G45216-001

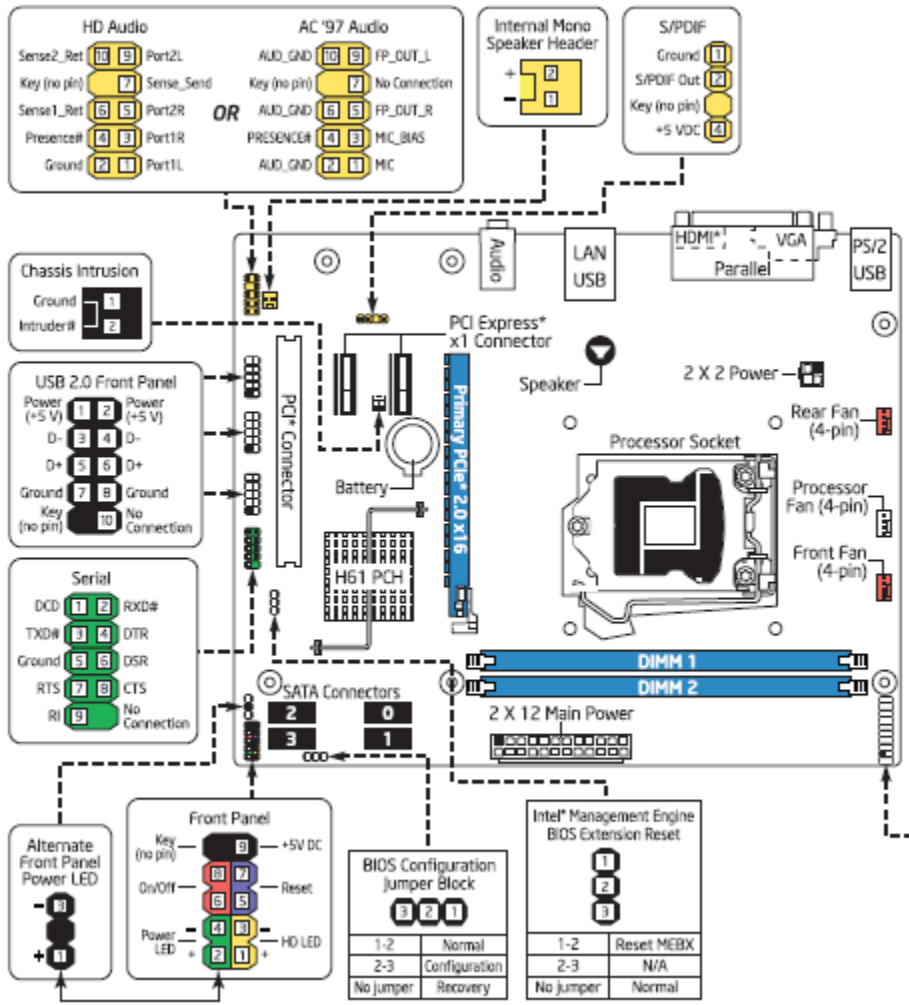

CAUTION
 Risk of explosion if the battery is replaced with an incorrect type. Batteries should be recycled where possible. Disposal of used batteries must be in accordance with local environmental regulations.

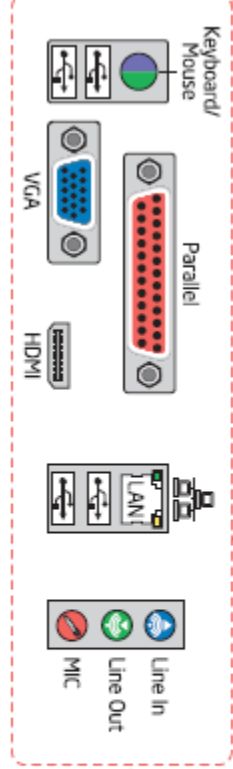

HD Audio		AC '97 Audio	
Sense2_Ret	16 19	AUD_GND	10 9
Key (no pin)	27	Key (no pin)	7
Sense1_Ret	6 5	AUD_GND	16 15
Presence#	4 3	PRESENCE#	4 3
Ground	24 21	AUD_GND	14 11
		MIC	



Chassis Intrusion	
Ground	1
Intruder#	2

USB 2.0 Front Panel	
Power (+5 V)	1 2
D-	3 4
D+	5 6
Ground	7 8
Key (no pin)	10

Serial	
DCD	1 2
TXD#	3 4
Ground	5 6
RTS	7 8
RI	9

BIOS Configuration Jumper Block	
1-2	Normal
2-3	Configuration
No jumper	Recovery

Intel® Management Engine BIOS Extension Reset	
1-2	Reset MEBX
2-3	N/A
No jumper	Normal

TPM Header	
No Connection	20 19
TPM_CLKRUN#	18 17
TPM_SERR#	16 15
No Connection	14 13
Ground	12 11
LAD0	10 9
LAD2	8 7
No Connection	6 5
Key (no pin)	3
Ground	2 1

Attach this label near the back panel connectors.
 Attach this label to the inside surface of the chassis.

*Other names and brands may be claimed as the property of others. Copyright © 2011, Intel Corporation. All rights reserved.