

BIOS Configuration	
1-2	Normal
2-3	Configuration
No Jumper	Recovery

Serial	
DCD	1 2 000#
TXD#	3 4 DTR
GND	5 6 DSR
RTS	7 8 CTS
RX	9 10 NC


HD Audio Link	
GND	15 NC
3.3V	14 NC
STER	13 S01
+12 V	10 S10
3.3 Vcc	8 S10
GND	6 S10
3.3 Vcc	5 SYNC
GND	4 RST#
GND	2 3 BLK

Audio	
Port1L	1 2 GND
Port1R	3 4 Presence#
Port2R	5 6 Sense1_1bit
Port2L	7 8 Sense2_1bit
Key	9 10

SPDIF	
1 Vcc	SPDIF OUT
2	Ground
3	


USB	
+5V	1 2
D-	3 4
D+	5 6
GND	7 8
Key	9 10

IEEE 1394a	
TPA1+	1 2
GND	3 4
TPA2+	5 6
+12V	7 8
Key	9 10



CAUTION

Risk of explosion if the battery is replaced with an incorrect type. Batteries should be recycled where possible. Disposal of used batteries must be in accordance with local environmental regulations.

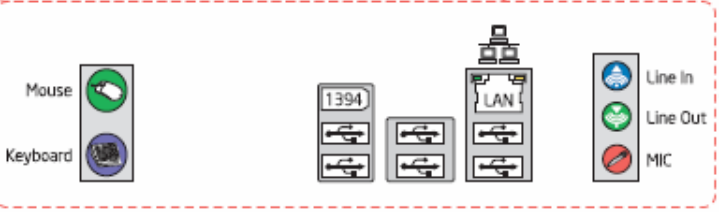

Attach this label to the inside surface of the chassis.

Attach this label near the back panel connectors.

*Other names and brands may be claimed as the property of others. Copyright © 2008, Intel Corporation. All rights reserved.