




# Innovation from the start

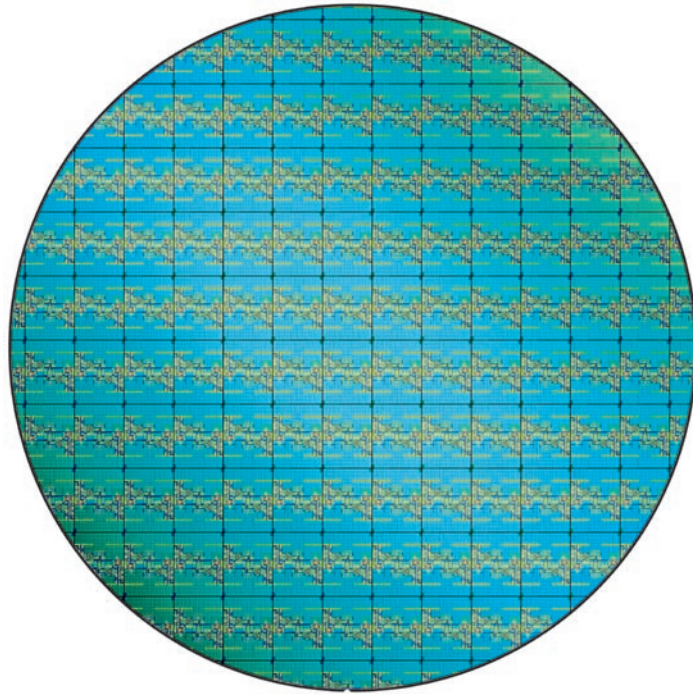

Expanding the power of enterprise computing, Intel's dual-core Itanium<sup>®</sup> processor is the world's first billion-transistor processor and enables enterprise servers to deliver up to twice the performance while consuming less power.

## Intel<sup>®</sup> Microprocessors. Innovation has no endpoint.



**4004 Processor**  
Introduced: **1971**  
Initial clock speed: 108 KHz  
Number of transistors: 2,300  
Circuit line width: 10 micron




**8008 Processor**  
Introduced: **1972**  
Initial clock speed: 500-800 KHz  
Number of transistors: 3,500  
Circuit line width: 10 micron




**8080 Processor**  
Introduced: **1974**  
Initial clock speed: 2 MHz  
Number of transistors: 4,500  
Circuit line width: 6 micron



**8086 Processor**  
Introduced: **1978**  
Initial clock speed: 5 MHz  
Number of transistors: 29,000  
Circuit line width: 3 micron



**8088 Processor**  
Introduced: **1979**  
Initial clock speed: 5 MHz  
Number of transistors: 29,000  
Circuit line width: 3 micron



**Intel286 Processor**  
Introduced: **1982**  
Initial clock speed: 6 MHz  
Number of transistors: 134,000  
Circuit line width: 1.5 micron



**Intel386<sup>®</sup> Processor**  
Introduced: **1985**  
Initial clock speed: 16 MHz  
Number of transistors: 275,000  
Circuit line width: 1.5 micron




**Intel486<sup>®</sup> Processor**  
Introduced: **1989**  
Initial clock speed: 25 MHz  
Number of transistors: 1.2 million  
Circuit line width: 1 micron



**Pentium<sup>®</sup> Processor**  
Introduced: **1993**  
Initial clock speed: 66 MHz  
Number of transistors: 3.1 million  
Circuit line width: 0.8 micron




**Pentium<sup>®</sup>-Pro Processor**  
Introduced: **1995**  
Initial clock speed: 200 MHz  
Number of transistors: 5.5 million  
Circuit line width: 0.35 micron



**Pentium<sup>®</sup>-II Processor**  
Introduced: **1997**  
Initial clock speed: 300 MHz  
Number of transistors: 7.5 million  
Circuit line width: 0.25 micron



**Celeron<sup>®</sup> Processor**  
Introduced: **1998**  
Initial clock speed: 266 MHz  
Number of transistors: 7.5 million  
Circuit line width: 0.25 micron



**Pentium<sup>®</sup>-III Processor**  
Introduced: **1999**  
Initial clock speed: 500 MHz  
Number of transistors: 9.5 million  
Circuit line width: 0.25 micron




**Pentium<sup>®</sup>-4 Processor**  
Introduced: **2000**  
Initial clock speed: 1.5 GHz  
Number of transistors: 42 million  
Circuit line width: 0.18 micron



**Itanium<sup>®</sup> Processor**  
Introduced: **2001**  
Initial clock speed: 800 MHz  
Number of transistors: 3.1 million  
Circuit line width: 0.18 micron



**Intel<sup>®</sup> Xeon<sup>®</sup> Processor**  
Introduced: **2001**  
Initial clock speed: 1.7 GHz  
Number of transistors: 42 million  
Circuit line width: 0.18 micron



**Itanium<sup>®</sup> 2 Processor**  
Introduced: **2002**  
Initial clock speed: 1 GHz  
Number of transistors: 220 million  
Circuit line width: 0.18 micron