

## Low-Voltage Regulator Board Installation

This section describes the installation of the low-voltage regulator board used for the low-voltage CPU like IntelDX4 processor. The low-voltage regulator offers advanced power saving features.

→ **NOTE :** To disable the low-voltage regulator board, insert jumper pins onto pin 1-2 and pin 15-16 of J2, then reboot the system.

- Remove jumpers from connector J2.
- Place the low-voltage regulator board as shown on the figure below with the correct pin orientation.

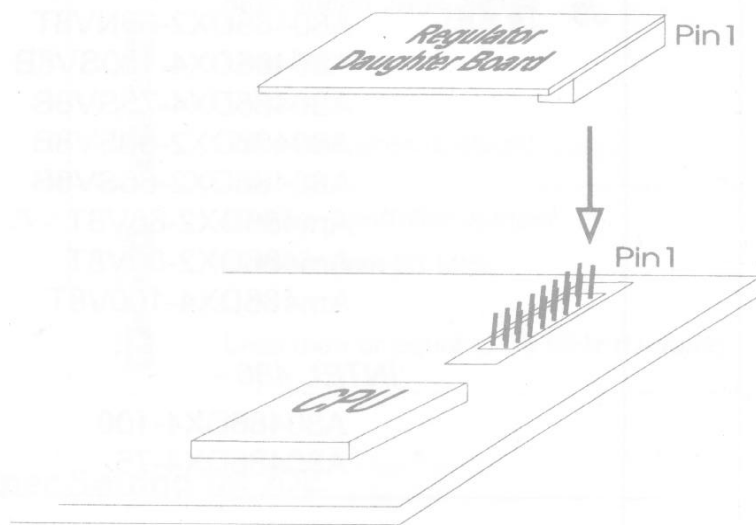


Figure 2-2. Low-Voltage Regulator Board Installation