


C&C Lab. Co. Open Site 4

Customer: ABIT	Model : SI-2PaV0.2	Date: 18 Oct 2002
Antenna : CBL6112B	Polr. : Vertical-10 M	Time: 15:45:30
S.P.A. : R316(3)2	PreAmp.: NA	file#: 5483
Rule : EN55022-B	Mode : CD	Temp.(C): 27
Receiver: ESUS10	Tester : TONY TSAI	Humid(%): 65
Remark : FULL SYSTEM	PING LAN(1) 2 USB MOUSE	1024X768 16BIT 8
5HZ WITH CRT CABLE		

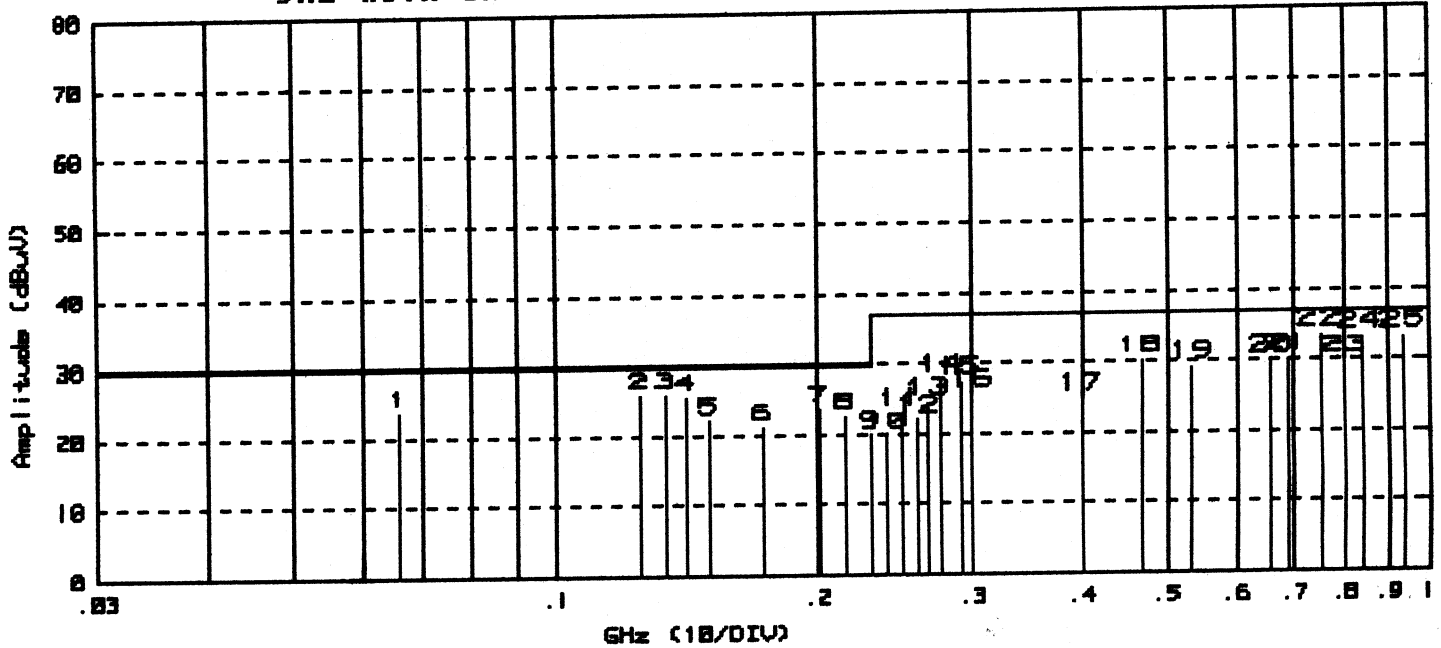

Note: with 'x' mark means QP reading


No.	FREQ. <MHz>	RAW DATA <dBuV>	C'Fac <dB>	CORR'd < dBuV/m >	LIMIT	MARGIN <dB>	ANTENNA HEIGHT	TABLE ANGLE
1	66.22	15.5	8.0	23.5	30.0	-6.5	100.0	87.0
2	124.91	11.2	14.4	25.6	30.0	-4.4	100.0	8.2
3	133.85	11.4	14.2	25.6	30.0	-4.4	100.0	360.0
4	141.15	11.3	14.0	25.3	30.0	-4.7	100.0	0.0
5	149.99	8.2	13.8	22.0	30.0	-8.0	100.0	360.0
6	173.20	8.4	12.6	21.0	30.0	-9.0	100.0	360.0
7	201.02	10.8	12.7	23.5	30.0	-6.5	100.0	360.0
8	215.14	9.7	12.8	22.5	30.0	-7.5	100.0	0.0

9	229.23	6.4	13.5	19.9	30.0	-10.1	100.0	360.0
10	239.83	4.6	15.1	19.7	37.0	-17.3	100.0	.7
11	248.87	6.6	16.4	23.0	37.0	-14.0	100.0	356.6
12	260.52	4.9	17.1	22.0	37.0	-15.0	100.0	36.2
13	267.01	7.0	17.4	24.4	37.0	-12.6	100.0	243.7
14	276.66	9.9	17.8	27.7	37.0	-9.3	100.0	168.6
15	290.94	9.3	17.9	27.2	37.0	-9.8	100.0	0.0
16	299.99	7.5	18.0	25.5	37.0	-11.5	100.0	204.6
17	399.60	4.0	20.8	24.8	37.0	-12.2	400.0	224.3
18	466.95	8.0	21.9	29.9	37.0	-7.1	400.0	0.0
19	533.90	4.6	24.5	29.1	37.0	-7.9	199.4	25.0
20	658.30	4.9	24.9	29.8	37.0	-7.2	301.3	0.0
21	687.20	4.9	25.1	30.0	37.0	-7.0	199.4	222.3
22	752.20	7.7	25.7	33.4	37.0	-3.6	202.1	39.4
23	800.20	4.5	25.1	29.6	37.0	-7.4	202.1	162.5
24	835.90	6.6	26.4	33.0	37.0	-4.0	202.1	360.0
25	935.20	5.2	27.8	33.0	37.0	-4.0	202.1	360.0

C&C Lab. Co. Open Site 4

Customer: ABIT	Model : SI-2P V0.2	Date: 18 Oct 2002
Antenna : CBL6112B	Polr. : Horizontal-10 M	Time: 16:30:16
S.P.A. : R316(3)2	PreAmp.: NA	file#: 5484
Rule : EN55022-B	Mode : CD	Temp.(C): 27
Receiver: ESUS10	Tester : TONY TSAI	Humid(%): 65
Remark : FULL SYSTEM	PING LAN(1) 2 USB MOUSE	1024X768 16BIT 8

5HZ WITH CRT CABLE

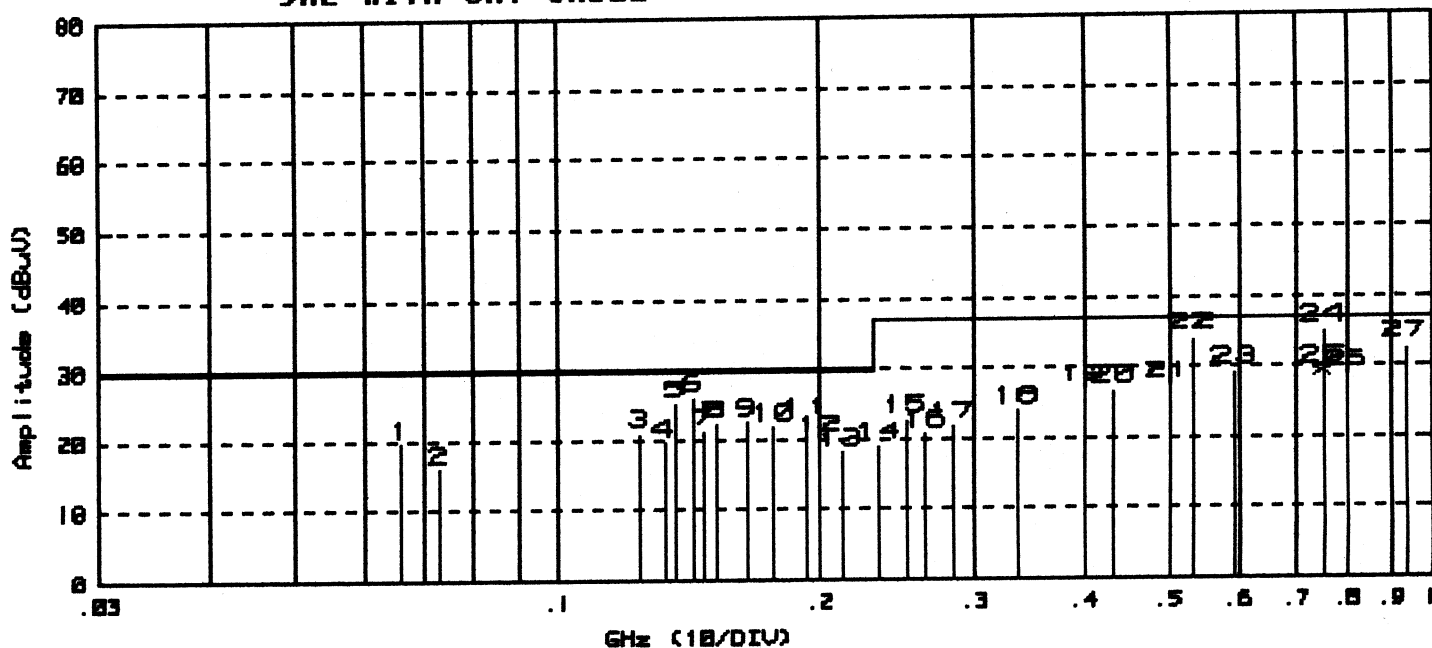

Note: with 'x' mark means QP reading

No.	FREQ. <MHz>	RAW DATA <dBuV>	C'Fac <dB>	CORR'd < dBuV/m >	LIMIT	MARGIN <dB>	DETECTOR	ANTENNA HEIGHT	TABL ANGL
1	66.28	11.4	8.1	19.5	30.0	-10.5	Pk	400.0	102.
2	72.94	7.3	8.7	16.0	30.0	-14.0	Pk	400.0	0.
3	124.04	6.3	14.5	20.8	30.0	-9.2	Pk	400.0	0.
4	132.31	5.1	14.3	19.4	30.0	-10.6	Pk	400.0	183.
5	136.85	10.9	14.1	25.0	30.0	-5.0	Pk	400.0	312.
6	143.27	11.8	14.0	25.8	30.0	-4.2	Pk	400.0	0.
7	146.66	7.2	13.9	21.1	30.0	-8.9	Pk	400.0	204.
8	151.51	8.4	13.7	22.1	30.0	-7.9	Pk	400.0	140.

9	165.34	9.2	13.1	22.3	30.0	-7.7	Pk	400.0	0.0
10	176.70	9.2	12.4	21.6	30.0	-8.4	Pk	400.0	189.2
11	192.78	10.0	12.5	22.5	30.0	-7.5	Pk	400.0	327.4
12	199.99	7.3	12.7	20.0	30.0	-10.0	Pk	400.0	0.0
13	211.18	5.2	12.8	18.0	30.0	-12.0	Pk	400.0	351.5
14	233.20	4.9	14.1	19.0	37.0	-18.0	Pk	400.0	180.7
15	250.73	6.0	16.6	22.6	37.0	-14.4	Pk	400.0	282.2
16	263.58	3.3	17.3	20.6	37.0	-16.4	Pk	400.0	7.2
17	283.49	3.8	17.9	21.7	37.0	-15.3	Pk	400.0	222.3
18	335.80	5.8	18.0	23.8	37.0	-13.2	Pk	299.9	360.0
19	400.20	6.0	20.8	26.8	37.0	-10.2	Pk	299.9	228.9
20	432.60	5.4	21.2	26.6	37.0	-10.4	Pk	299.9	45.4
21	500.00	4.1	23.0	27.1	37.0	-9.9	Pk	299.9	94.7
22	532.00	9.3	24.5	33.8	37.0	-3.2	Pk	299.2	360.0
23	593.80	4.8	24.3	29.1	37.0	-7.9	Pk	299.2	105.7
24	752.21	9.1	25.7	34.8	37.0	-2.2	Pk	199.9	312.7
25	752.23	3.4	25.7	29.1	37.0	-7.9	QP	199.9	312.7
26	798.70	3.4	25.2	28.6	37.0	-8.4	Pk	199.9	360.0
27	933.10	4.6	27.8	32.4	37.0	-4.6	Pk	199.9	296.8